

ANT-LTE-ASM-02

GPRS/EDGE/UMTS/HSPA/LTE, 2 dBi, omni-directional, rubber duck antenna



- > Small size for compact fit
- > Lightweight for portable deployment
- > Tilt and swivel design
- > Flexible installation
- > SMA connector (male) supported

Specifications

Antenna Characteristics

Frequency: 800/900/1800/2100/2600 MHz
Antenna Type: Omni-directional
Typical Antenna Gain: 2 dBi
Connector: SMA (male)
Impedance: 50 ohms
Polarization: Linear, vertical
HPBW/horizontal: 360°
V.S.W.R.: < 3

Physical Characteristics

Weight: 26 g
Dimensions: Length=161 mm

Radome Color: Black
Radome Material: Plastic
Installation: Straight mount


Environmental Limits

Operating Temperature: -22 to 65°F (-4 to 149°F)
Storage Temperature: -30 to 70°C (-22 to 158°F)
Ambient Relative Humidity: 5 to 95% (30°C, non-condensing)

Warranty

Warranty Period: 1 year
Details: See www.moxa.com/warranty

Dimensions

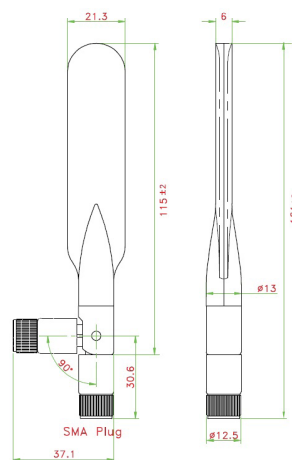

Unit: mm (inch)

Ordering Information

Available Models

ANT-LTE-ASM-02: GPRS/UMTS/HSPA/LTE, omni-directional, 2 dBi, rubber SMA

Can be used with the following products

Details: OnCell G3470A-LTE Series